

A photograph of two women lying down on a green surface. The woman on the left has long, wavy brown hair and is looking towards the camera with a slight smile. The woman on the right has long, straight black hair and is looking directly at the camera. Both are wearing white tops. The background is a solid green color.

 **Trendcollection**
BY GRANORTE

The floor for you

2022



The floor for you



GRANORTE is a Portuguese family company, founded in 1972 to recycle the cork waste from the wine cork stoppers manufacturing industry. From the beginning we have dedicated our attention to product research and development, resulting on innovative production processes and technical excellence.

Our significant know-how in cork allowed us to develop into an expanding producer of technical solutions using cork. Today, GRANORTE is a leading sustainable coverings manufacturer, producer of thrilling environmentally responsible products. One tradition was kept unchanged however: the quiet revolutionary way of promote ongoing, consistent, breakthrough creativity. This innovation culture and teamwork encouraging have been the basis of our success.

Our philosophy is to challenge what has become habitual, and to never be satisfied with anything less than the best. We seek perfection each and every day and ensure that our products meet all international quality requirements and technical specifications.

Our aim is to fascinate people, designing and creating stunning products that capture the imagination and inspire beautiful and eco-friendly interiors.

Using only the best raw materials and state-of-the-art technology, GRANORTE offers a diverse range of products for both residential and commercial environments, delivering eye-catching styles as well as superb quality.

Some good reasons for choosing

Trendcollection

Trendcollection delivers comfort, water resistance, wear resistance and ecological benefits in a range of economical and easy to install floor and wall coverings.

Water resistance

Trendcollection SOLIDTrend is water resistant, perfect for installation in areas where moisture can present problems.

Wear resistance

Trendcollection floors have a superior protection against abrasion and scuffs with its tough wear layer up to 0.55 mm thickness and enhanced DURAMOND or WEARTOP high performance finishes.

Stability

Trendcollection floors advanced composition allows for installations up to 400 m2 without expansion joints and over radiant heated floors.

Ease of installation

Trendcollection floors have patented UNICLIC and 3L TRIPLELOCK click systems, allowing easier and faster installation than comparable products. The planks can be installed over almost any subfloor without preparation.

Style

Trendcollection rich surface textures, the trendy colours and the high definition visuals contribute to the natural and stylish appearance of the floor.

Eco-conscious

Trendcollection products are recyclable, reusable and orthophthalate-free. The use of cork is an ecological choice but also provides warmth, comfort and effective sound and thermal insulation.

Healthy

Trendcollection is integrated with Microban® technology during the manufacturing process. This built-in protection actively reduces the growth of mould and odour causing bacteria for the lifetime of the product.

In conclusion

Trendcollection floors boast superior resistance and stability, whilst combining the beauty of wood, the durability of vinyl, the comfort of cork and the ease of click installation. Trendcollection floors are ideal for retail, hospitality, corporate, educational, and residential environments.



WEARTOP
high performance coating

DURAMOND
surface coating technology

High performance and low VOCs surface finish with very high wear, impact and scratch resistance to maintain the floor's visual over time and traffic.

GREENGUARD
PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL GREENGUARD
UL 2818
GOLD

BB
Ausschuss zur gesundheitlichen Bewertung von Bauprodukten

A+
EMISSIONS DANS L'AIR INTERIEUR
A+ A B C

Certification assuring that strict indoor air emissions limits are met.

CleanCork
antibacterial protection for the GRANORTE
HELPS PREVENT BACTERIA GROWTH
POWERED BY MICROBAN

CleanSurface
antibacterial protection for the GRANORTE
HELPS PREVENT BACTERIA GROWTH
POWERED BY MICROBAN

Integrated antibacterial protection in the pressed cork underlay and the surface finish thanks to exclusive Microban® technology.

HDDP
high definition digital print

Proprietary HDDP technology delivers unrivalled digital print quality using high resolution together with variable dot printing and exclusive printing techniques.

MICRO BEVEL
4 edges micro-beveled

Micro-bevelled edge aesthetic enhancement.

μCERAMIC
enhanced wear layer

Micro-sized silica beads are embedded in the wear layer to reinforce the floor's performance against wear.

UNICLIC
click installation system

i4F
click installation system

Trendcollection floating floors use the industry's leading UNICLIC® and i4F click systems for simple and fast installation.

AWS
authentic wood structure

Production technology that finely emboss wood structure making floors look and feel natural.

AGGLOPURE
no added formaldehyde

NOPHTHALATE
100% orthophthalates free

Formaldehyde-free, PVC-free and phthalates-free cork agglomeration technology.



Functional performance

SOLIDTrend

□ **Loft**
38 505 05



SOLIDTrend



Solid Polymer Core



0,55 mm Wear layer



Waterproof core



High Scratch and Abrasion Resistance



Stable to light and temperature



Impact and Indentation Resistant



Suitable for underfloor Heating



No Telegraphing



Acoustic Cork Underlay



Easy and Fast angle/drop-lock instalation



Easy to clean and maintain



Very low indoor air emissions



Orthophthalate-Free





Reusable

SOLIDTrend

residential
warranty
25
years

commercial
warranty
10
years

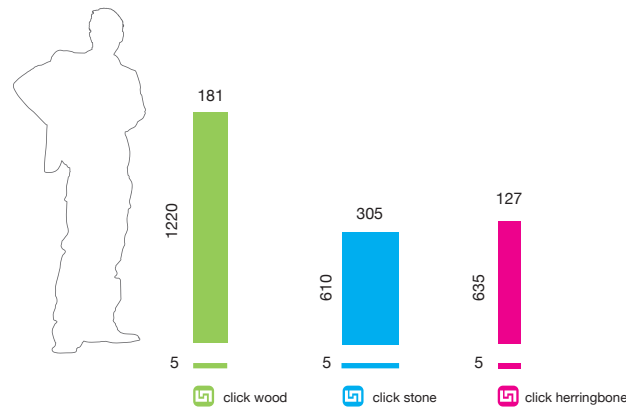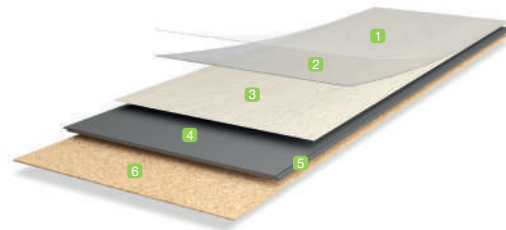

- 1 DURAMOND® hard-wearing super matt finish
- 2 0,55 mm wear layer with embossing
- 3 Authentic look printed decorative film
- 4 Waterproof Solid Rigid Core polymer
- 5 i4F angle/drop-lock system for fast installation
- 6 Integrated cork underlay for thermal and sound insulation

DURAMOND
surface coating technology

i4F
click installation system

SRC CORE
waterproof solid rigid core

MICRO BEVEL
4 edges micro-beveled

NOPHTHALATE
100% orthophthalates free

23
Acoustic


34
Thermal



EN 14041:2008



Sea Sand Herringbone
238 605 02

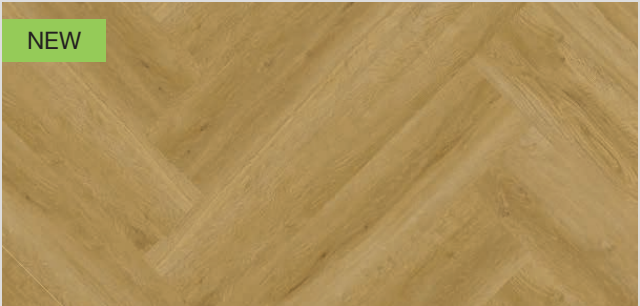

Timberland Herringbone
238 605 09



Barnwood Herringbone
238 605 07



Soho Grey Herringbone
238 605 03




Sheridan
38 505 06



Silver moon
38 505 04



Montana
38 505 08



Soho grey
38 505 03



Everest
38 505 01



Loft
38 505 05



Barnwood
38 505 07



Classic
38 505 10



Sea sand
38 505 02




Timberland
38 505 09



Concrete graphite
138 505 12



Concrete grey
138 505 11

 **Barnwood**
38 505 07

 **Sheridan**
38 505 06

 **Sea sand**
38 505 02

 **Silver moon**
38 505 04

 **Sea Sand Herrignbone**
238 605 02






Suitable for
underfloor Heating



SOLIDTrend



High Scratch and
Abrasion Resistance

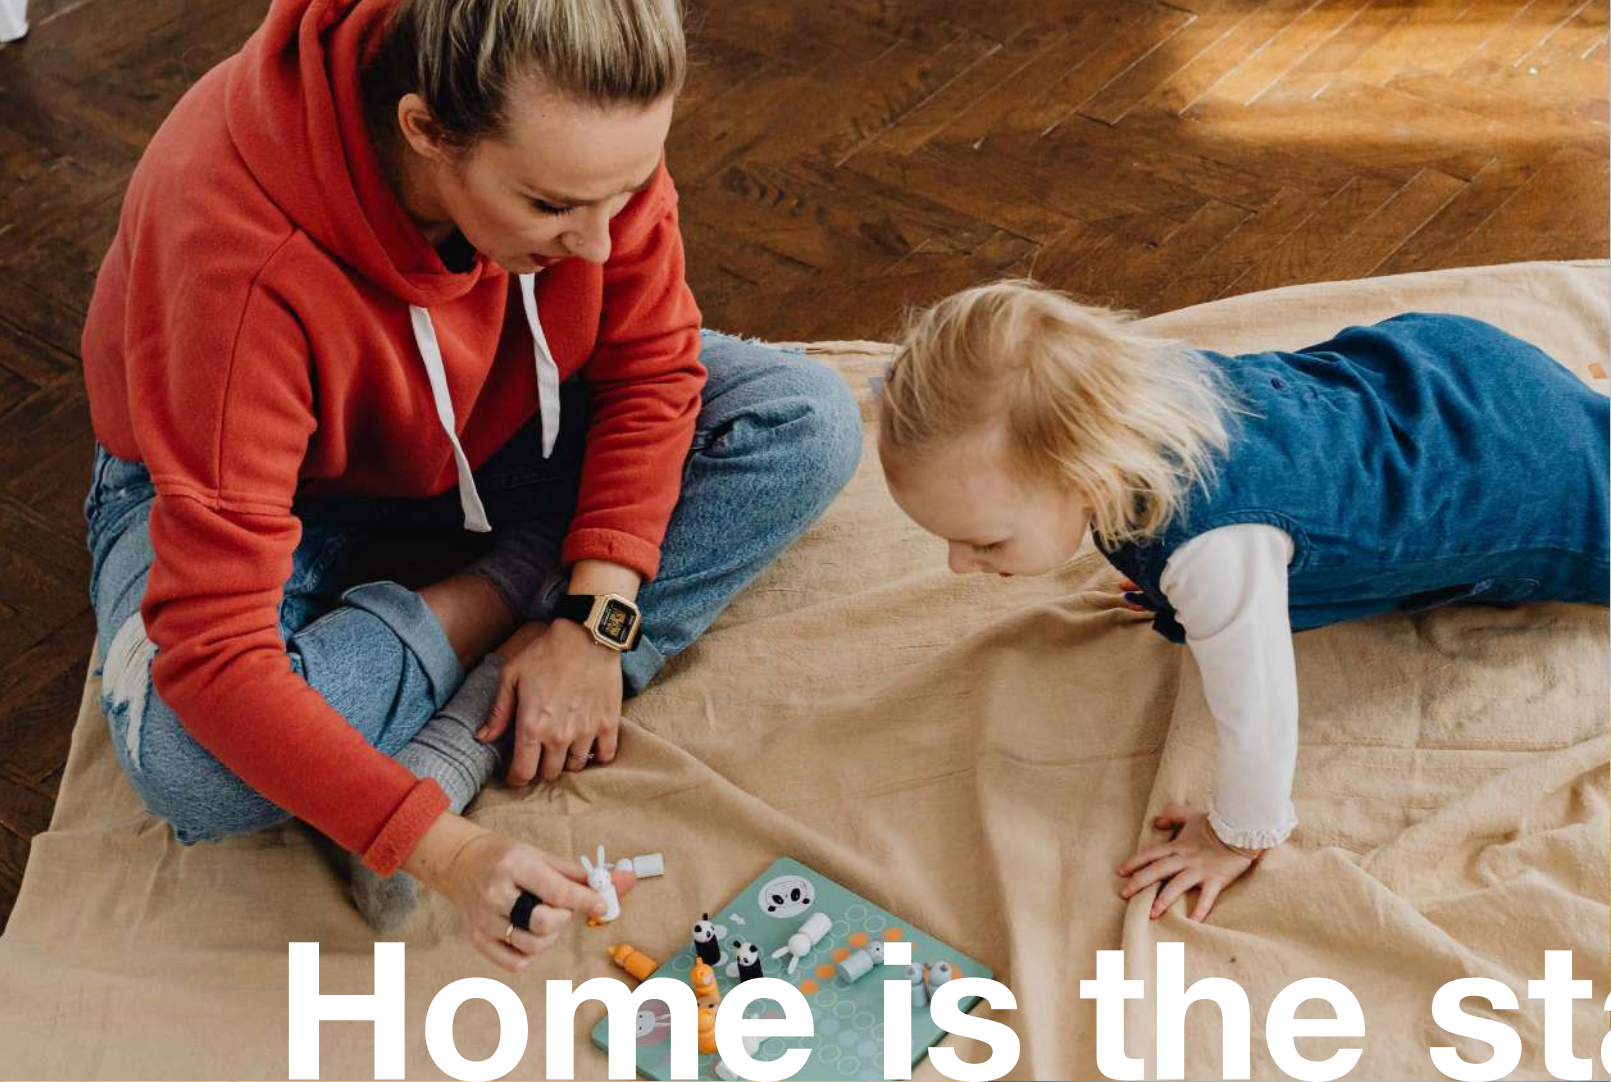


Home is the starting place
of love, hope and dreams.

Enduring charm

VINYLTrend



□ **Helios**
33 031 50



- | | | | |
|---|----------------------------------|---|--------------------------------------|
|  VINYL
HDF | LVT on HDF core |  0.33 | 0,33 mm Wear layer |
|  | Impact and Indentation Resistant |  | High Scratch and Abrasion Resistance |
|  | Suitable for underfloor Heating |  | No Telegraphing |
|  | Acoustic Cork Underlay |  | Fast Click Installation |
|  | Easy to clean and maintain |  | Very low indoor air emissions |
|  PHTHALATE
FREE | Orthophthalate-Free |  | Reusable |

residential
warranty
20
years

commercial
warranty
10
years

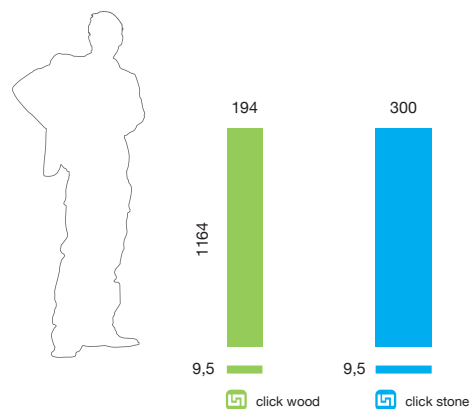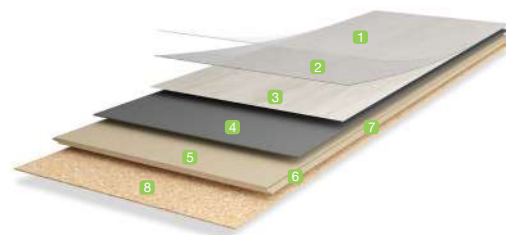

- 1 DURAMOND® Hard-wearing super matt finish
- 2 0,33 mm MICROCEAMIC wear layer with embossing
- 3 Authentic look printed decorative film
- 4 Vinyl core layer
- 5 Swell-resistant HDF core board
- 6 Uniclic® click system for fast installation
- 7 All around JointShield® edge sealing
- 8 CleanCork underlay for thermal and sound insulation, with Microban® antimicrobial protection



PROTECTION THAT LIVES ON
MICROBAN®



FSC® certified products are available upon request.



Concrete Warm
234 066 03



Hacienda
■ 33 081 07



Newance
■ 33 074 07



Newport
■ 33 013 81



Barn
■ 33 081 17



Alpine
■ 33 070 22



Chester
■ 33 033 10



Pearl
■ 33 000 05



Dune
■ 33 019 05




Fawn
■ 33 019 06




Tavern
■ 33 014 01



Iceland
■ 33 081 33




Cornfield
■ 33 002 32




Cottage
■ 33 013 51



Graphite
■ 33 081 14



Sunset
■ 33 070 01



Sahara
■ 33 070 03



Galleon
■ 33 017 41



Artisan
■ 33 054 61



Dove
■ 33 031 52



Navajo
■ 33 031 51




Midwest
■ 33 019 13



Polar
■ 33 013 31



Castle
■ 33 031 30



Helios
■ 33 031 50



Mountain
■ 33 031 12



Concrete Light
■ 234 066 02




Concrete Warm
■ 234 066 03



Concrete Dark
■ 234 066 04



Autumn
■ 33 033 25

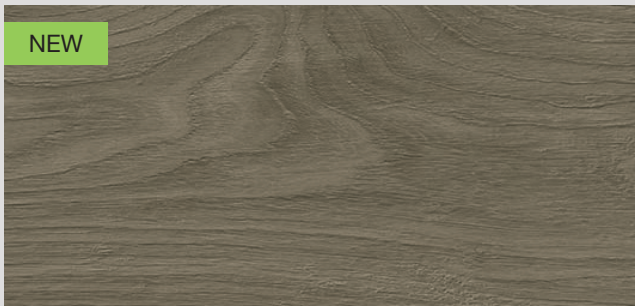

Spike
■ 33 032 71



Harvest
■ 33 033 71



Saddle
■ 33 033 11



Lakeside
■ 33 033 02



Harbor
■ 33 032 61

Artisan
33 054 61

Barn
33 081 17

Pearl
33 000 05

Barn
33 081 17





Very low indoor air emissions



*High Scratch and
Abrasion Resistance*



Home is where family belong
and laughter never ends.




□ Chestnut
129 008 40

Style and ecology

KENKOTrend NEW




□ **Satin**
129 008 39

- | | |
|---|---|
|  <i>Authentic look and feel</i> |  <i>PVC-free and phthalates-free</i> |
|  <i>Comfortable</i> |  <i>Warm</i> |
|  <i>High Scratch and Abrasion Resistance</i> |  <i>Impact and Indentation Resistant</i> |
|  <i>Suitable for underfloor heating</i> |  <i>No Telegraphing</i> |
|  <i>Impact and step noise reduction</i> |  <i>Fast click installation</i> |
|  <i>Easy to clean and maintain</i> |  <i>Very low indoor air emissions</i> |
|  <i>Extra-wide plank</i> |  <i>Reusable and Recyclable</i> |

residential warranty
15
years

commercial warranty
5
years

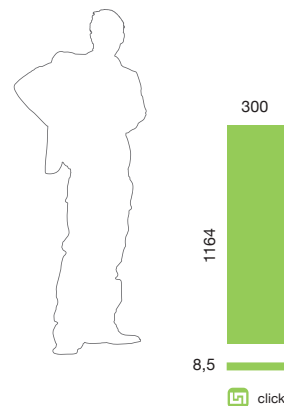

- 1 High abrasion-resistant Electron-beam hardening technology finish
- 2 High quality, authentic look, polypropylene decor surface
- 3 High-density natural cork composite
- 4 Swell-resistant HDF core board
- 5 Uniclic® click system for fast installation
- 6 All around JointShield® edge sealing
- 7 CleanCork underlay for thermal and sound insulation, with Microban® antimicrobial protection



PROTECTION THAT LIVES ON
MICROBAN®



FSC® certified products are available upon request.





□ Ivory
129 024 08



Ivory
■ 129 024 08



Ashland
■ 129 024 09



Saddle
■ 129 004 96



Satin
■ 129 008 39



Amber
■ 129 023 54



Chestnut
■ 129 008 40

□ **Satin**
129 008 39

□ **Sadlle**
129 004 96

□ **Ivory**
129 024 08

KENKOTrend

□ **Amber**
129 023 54



Suitable for underfloor heating



KENKOTrend



PVC-free and phthalates-free



Home is where
our story begins.





□ **Moccasin**
490 001 14

Sustainable design

DESIGNTrend



□ Seashell
490 001 13



High definition digital print



Sustainable cork surface



Comfortable



Warm



High Scratch and Abrasion Resistance



Impact and Indentation Resistant



Impact and step noise reduction



No Telegraphing



Suitable for underfloor heating



Fast click installation



Easy to clean and maintain



Very low indoor air emissions



PVC-free and phthalates-free



Reusable and Recyclable



residential warranty
10
years

commercial warranty
5
years



9,5 click wood



9,5 click stone

- 1 WEARTOP® Hard-wearing super matt finish with CleanSurface technology
- 2 Authentic look high Definition Digital Printing
- 3 High-density natural cork composite
- 4 Swell-resistant HDF core board
- 5 Uniclic® click system for fast installation
- 6 All around JointShield® edge sealing
- 7 CleanCork underlay for thermal and sound insulation, with Microban® antimicrobial protection

Vanilla
490 001 17



FSC® certified products are available upon request.



Blanc
■ 490 001 06



Seashell
■ 490 001 13




Pearl
■ 490 001 05



Breeze
■ 490 001 35



Blond
■ 490 001 02



Moccasin
■ 490 001 14



Antique
■ 490 001 01



Rust
■ 490 001 20



Greystone
■ 490 001 10



Smoke
■ 490 001 16



Vanilla
■ 490 001 17



Bisque
■ 490 001 18



Snow
■ 490 001 15



Oasis
■ 490 001 12




Tweed
■ 490 001 34




Spice
■ 490 002 01



Vogue
■ 490 001 53



Pure
■ 490 001 55



Concrete Pearl
■ 491 002 70



Concrete Cool
■ 491 002 71



□ **Blond**
490 001 02

Greystone
490 001 10

Bisque
490 001 18


Rust
490 001 20

Bisque
490 001 18






Impact and step noise reduction

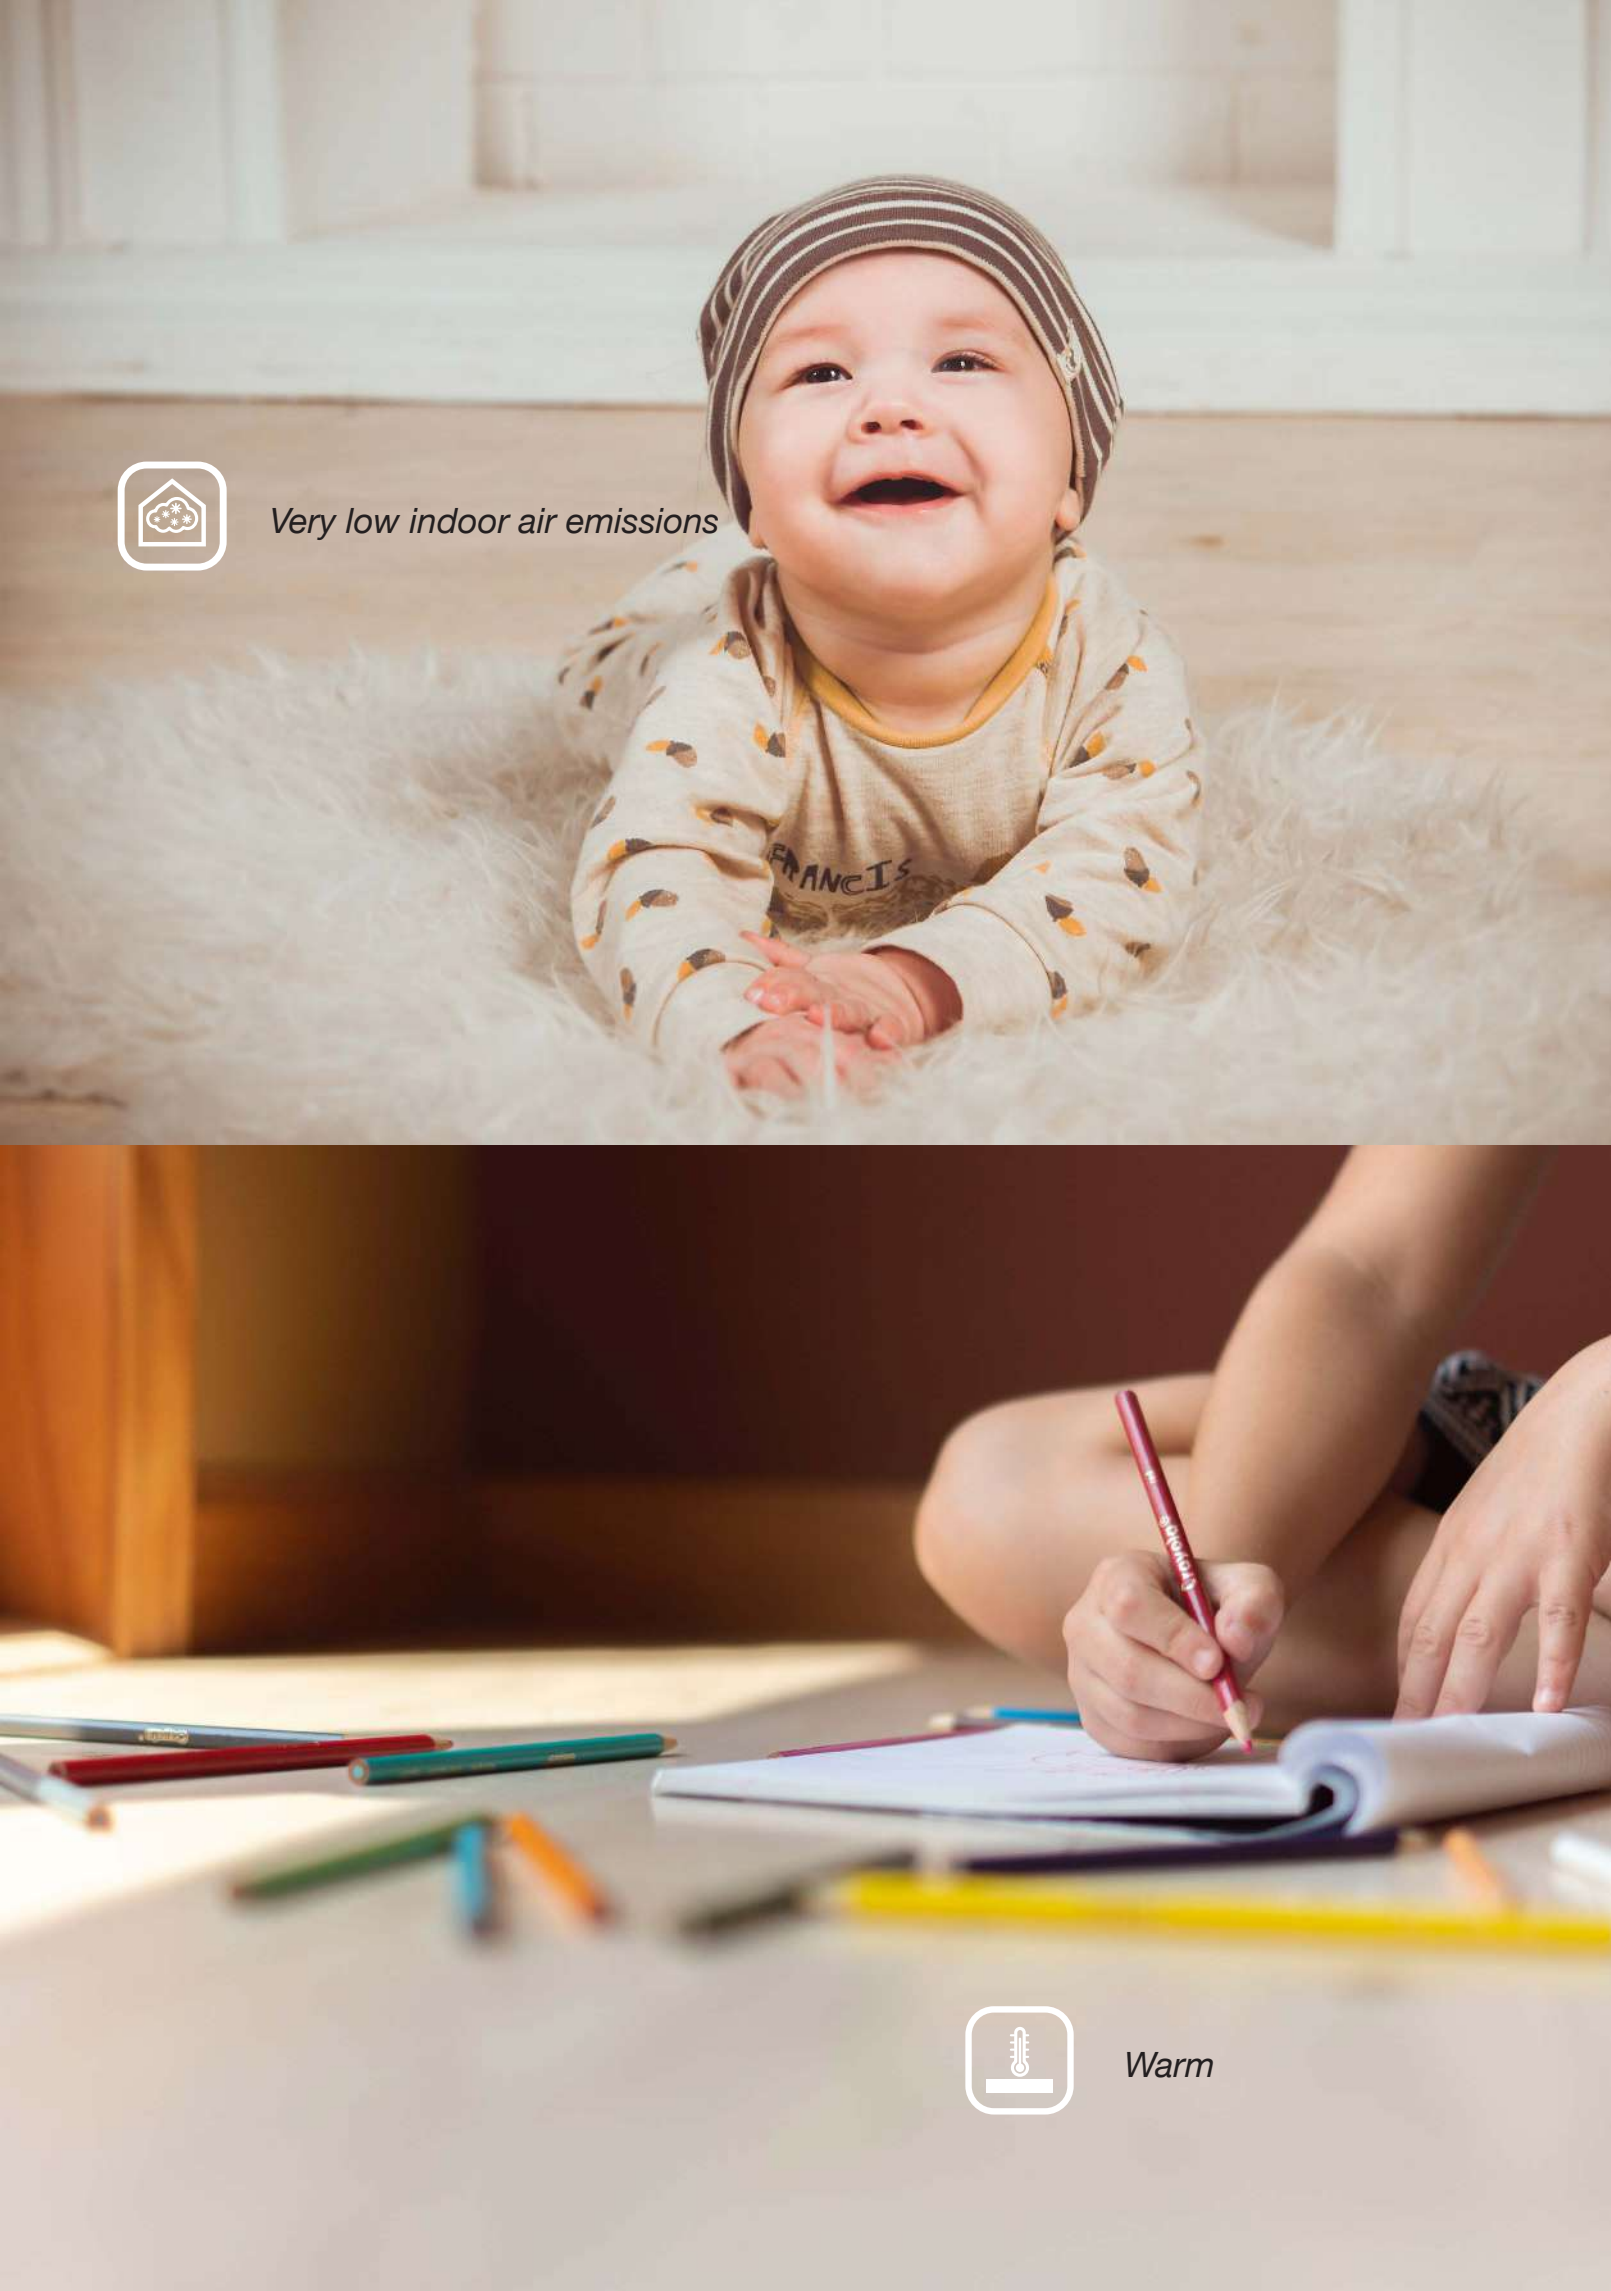

Very low indoor air emissions



Warm

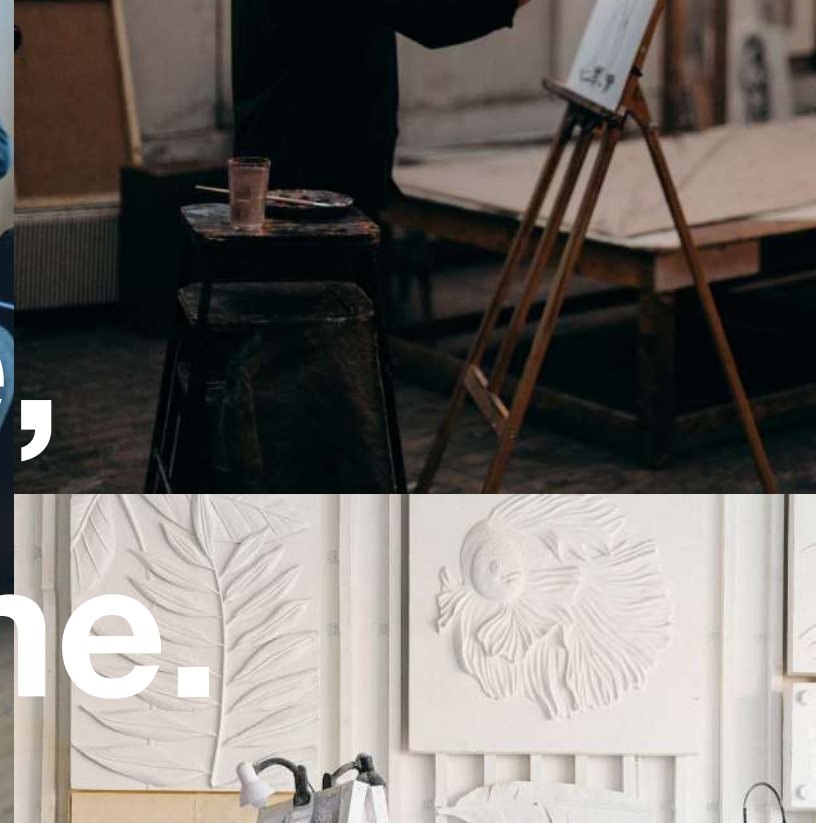

This is us. Our life,
our story, our home.

□ **Fein Cream**
12 214 11

Natural comfort


NATURTrend



□ **Klassik**
12 150 00

□ **Klassik white**
12 150 17

- | | | | |
|--|--------------------------------------|--|----------------------------------|
|  | Sustainable cork surface |  | Natural texture |
|  | Comfortable |  | Warm |
|  | High Scratch and Abrasion Resistance |  | Impact and Indentation Resistant |
|  | Suitable for underfloor heating |  | No Telegraphing |
|  | Impact and step noise reduction |  | Fast click installation |
|  | Easy to clean and maintain |  | Very low indoor air emissions |
|  | PVC-free and phthalates-free |  | Reusable and Recyclable |

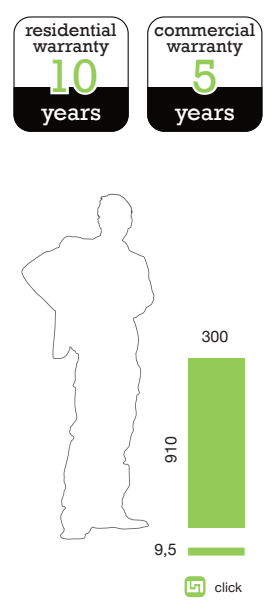

- 1 WEARTOP® Hard-wearing super matt finish with CleanSurface technology
- 2 Natural cork decorative veneer
- 3 High-density natural cork composite
- 4 Swell-resistant HDF core board
- 5 Uniclic® click system for fast installation
- 6 All around JointShield® edge sealing
- 7 CleanCork underlay for thermal and sound insulation, with Microban® antimicrobial protection

- | | | | | | | | |
|--|---|---|---|---|---|---|---|
| WEARTOP
high performance coating | HDFCORE
high-density fibreboard | UNICLIC
click installation system | JOINTSHIELD
edge sealing technology | NOPHTHALATE
100% orthophthalates free | AGGLOPURE
no added formaldehyde |  |  |
|--|---|---|---|---|---|---|---|



FSC® certified products are available upon request.



Element Rustic
12 111 00



Fein
■ 12 214 00



Klassik sand
■ 12 150 14




Mystic white
■ 12 440 17



Fein cream
■ 12 214 11



Klassik
■ 12 150 00



Klassik white
■ 12 150 17



Fein grey
■ 12 214 55




Marmor cream
■ 12 910 11




Marmor
■ 12 910 00




Element rustic
■ 12 111 00

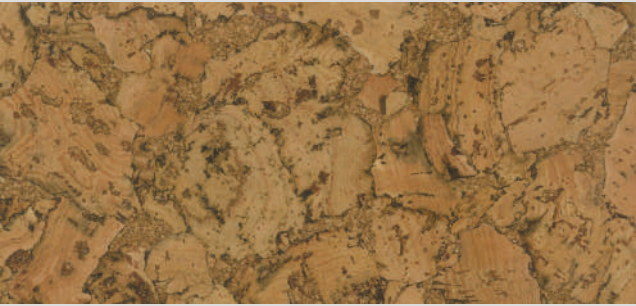

Castello
■ 12 241 00

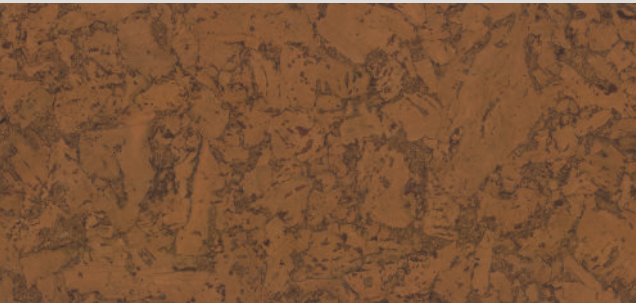

Castello terracotta
■ 12 241 60

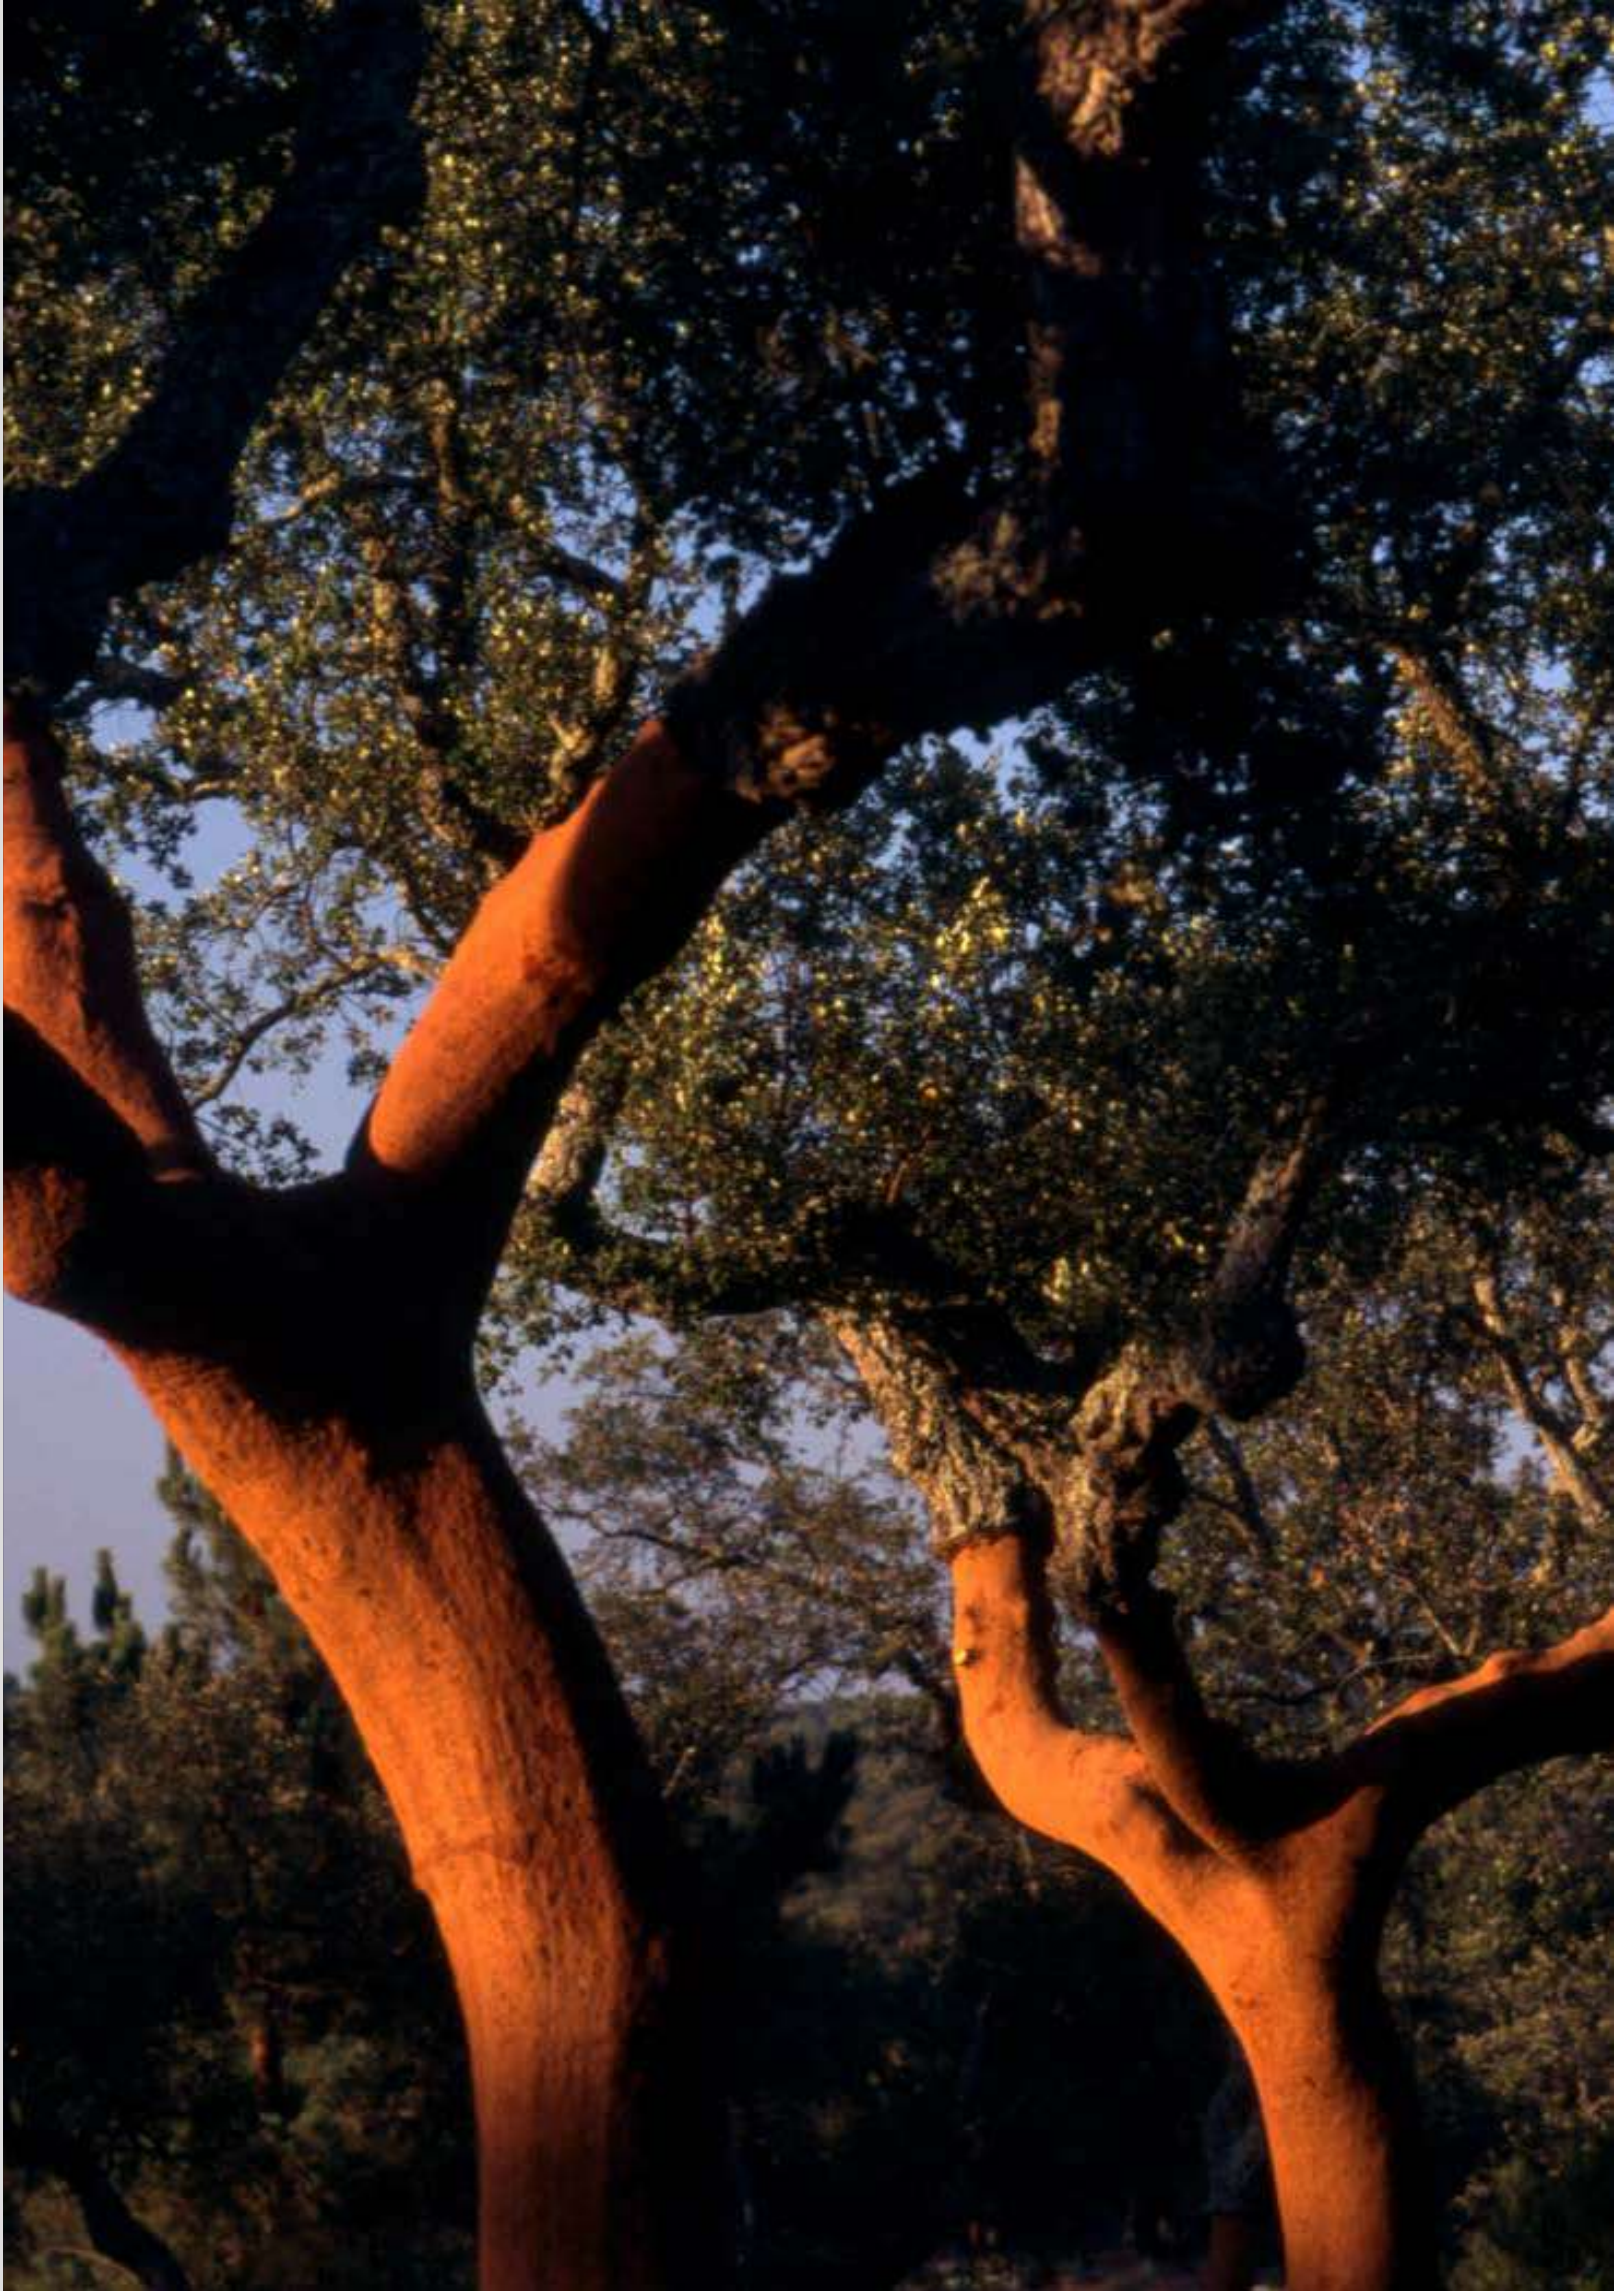



□ **Mystic White**
12 440 17


□ **Marmor Cream**
12 910 11

□ **Castello Terracotta**
12 241 60

□ **Marmor**
12 910 00



Warm

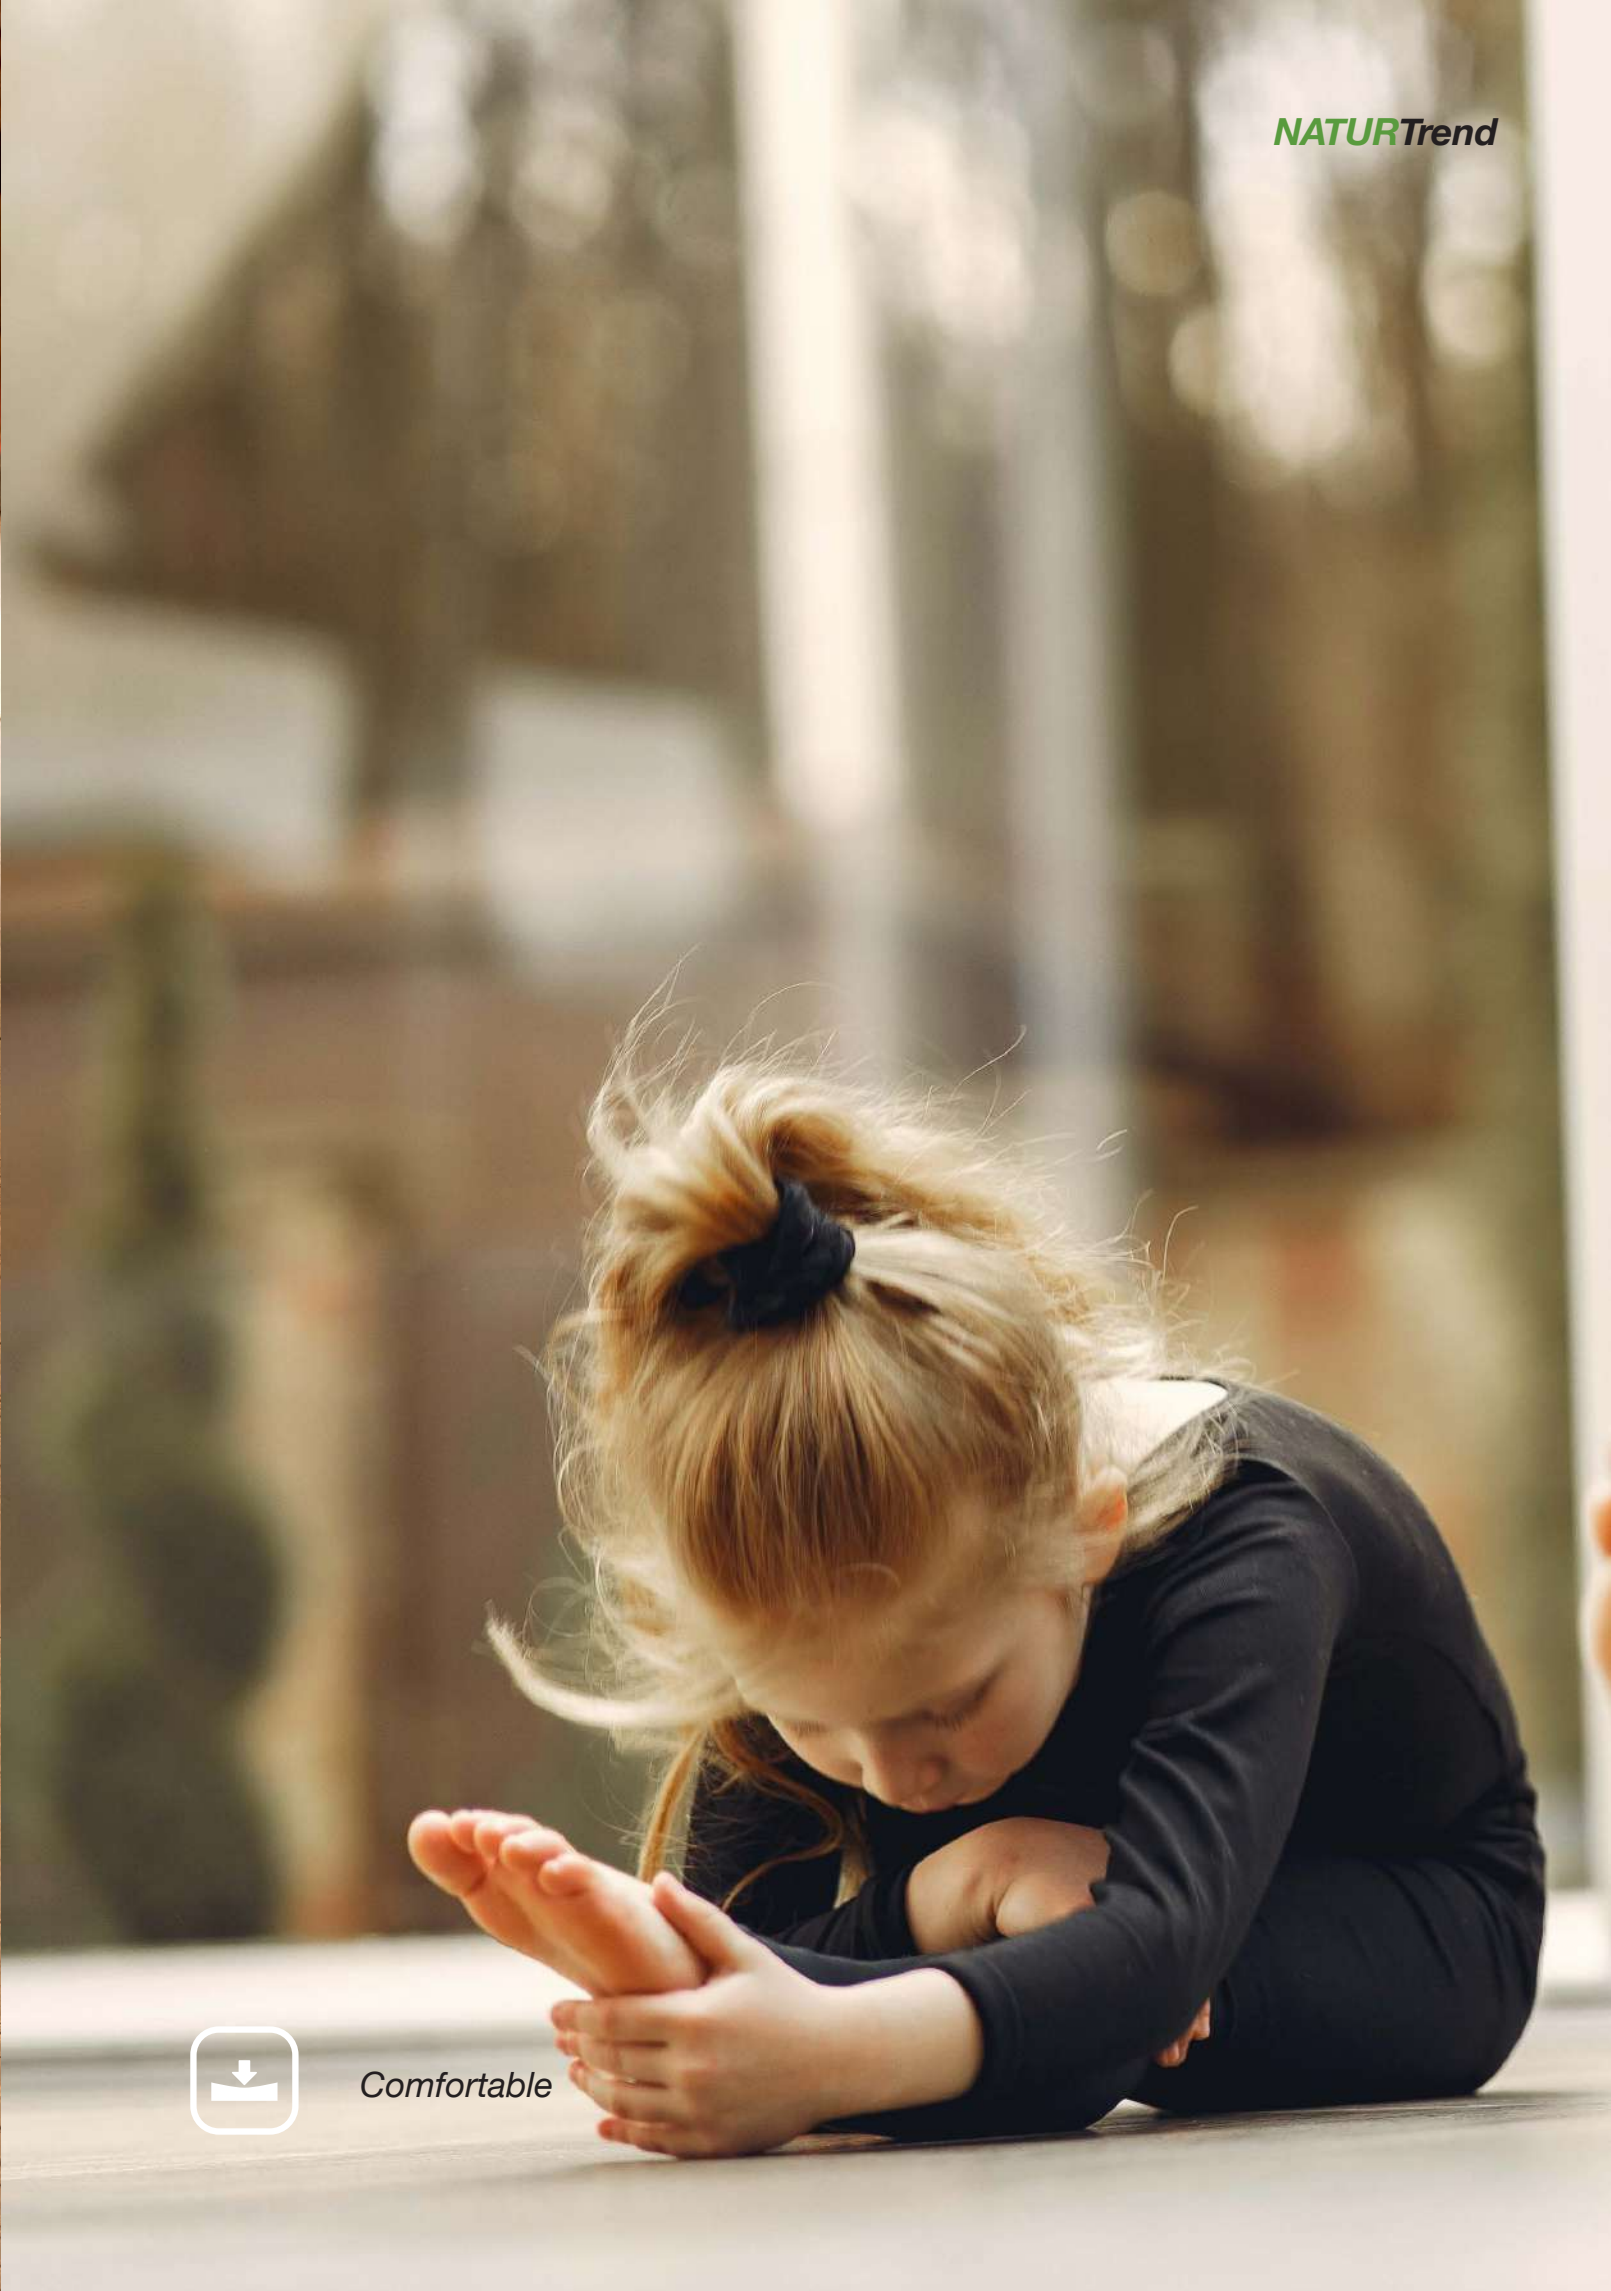

NATURTrend



Comfortable



□ **Country White**
505.241.081

Natural Wall

WALLTrend NEW

□ Country Greige
505 241 714





Natural cork texture



100% Sustainable cork



Comfortable



Warm



Noise reduction



Easy glued installation



Easy to clean and maintain



Very low indoor air emissions




Formaldehyde-free,
PVC-free and phthalates-free



Recyclable



glue down

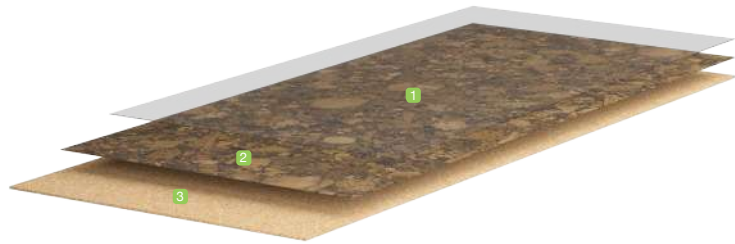

- 1 Wax matt finish
- 2 Natural cork decorative veneer
- 3 Soft agglomerated cork

PARAWAX

flexible wax coating

GLUE-DOWN

glue-down installation

AGGLOPURE

no added formaldehyde






Grain
■ 505 020 000



Gem
■ 505 200 000



Mocha
■ 505 100 000




Element Rustic
■ 505 110 000




Forest
■ 505 700 000



River
■ 505 131 000



Twist Red
■ 505 900 091




Twist Green
■ 505 900 092




Country
■ 505 241 000



Country White
■ 505 241 081



Country Red
■ 505 241 089




Country Blue
■ 505 241 087




Country Pearl
■ 505 241 074



Country Greige
■ 505 241 714

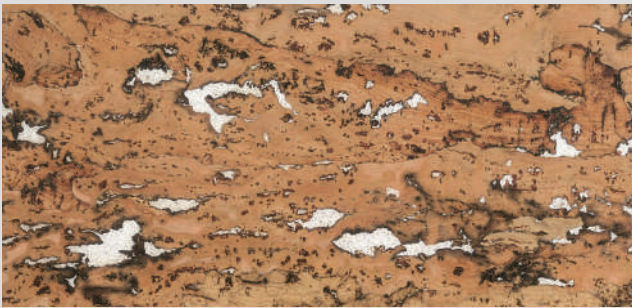

Primus Rustic White
■ 505 170 081

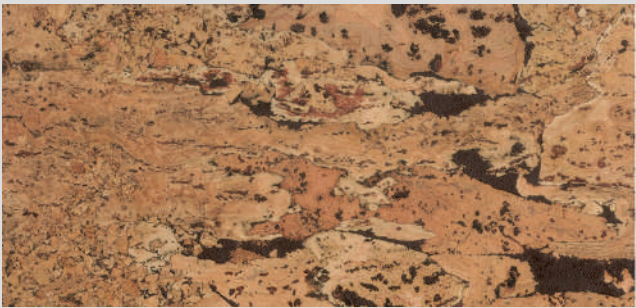


Primus Rustic Brown
■ 505 170 086



□ **Country Blue**
505 241 087

 **Mocha**
505 100 000

 **Country White**
505 241 001

 **River**
505 131 000

 **Mocha**
505 100 000


 **Gem**
505 200 000



Natural cork texture



Warm

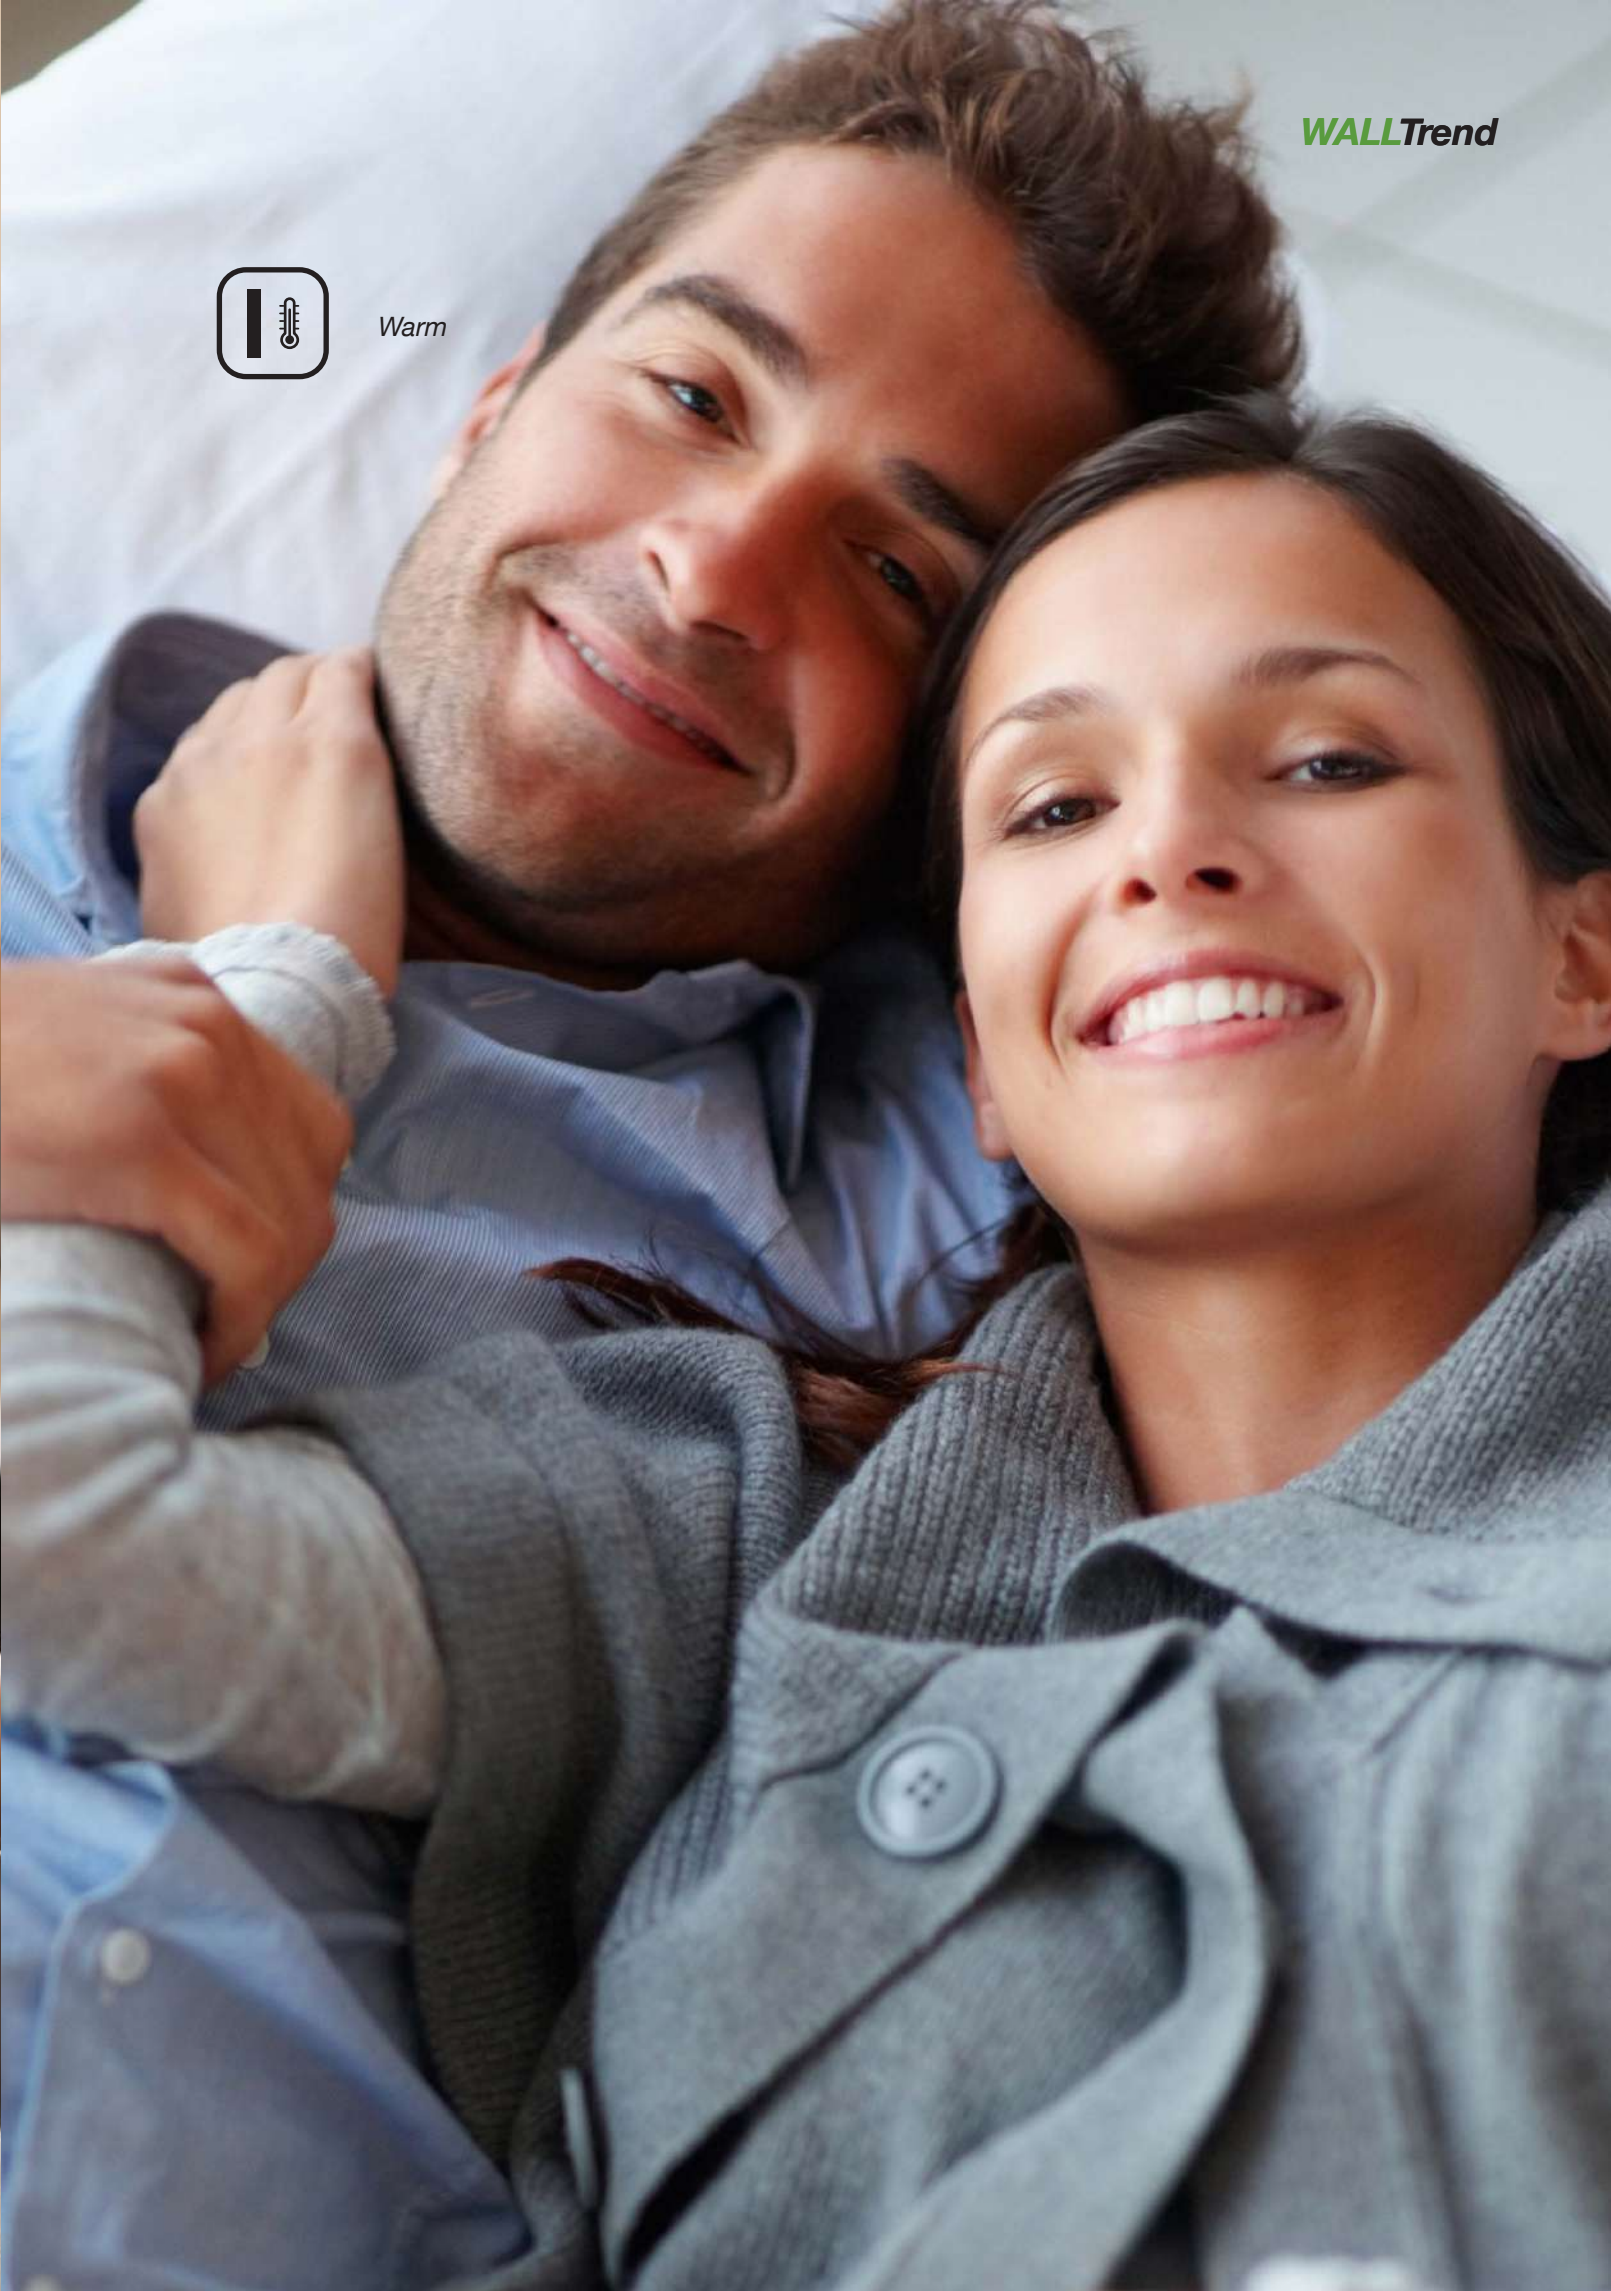



Country Pearl

505 241 074



Technical Data

			<i>SOLID</i> Trend	<i>VINYL</i> Trend	<i>KENKO</i> Trend	<i>DESIGN</i> Trend	<i>NATUR</i> Trend	<i>WALL</i> Trend
General Properties	Standard	Unit						
Level of use Residential/Commercial	EN ISO 10874	Class	23 / 34	23 / 32	23 / 34	23 / 31	23 / 31	
Dimensions	EN ISO 24342	mm	(WD) 1220x181±0,1% (ST) 610x305±0,1% (HB) 635x127±0,1%	(WD) 1164x194±0,1% (ST) 1164x300±0,1%	1164x300±0,1%	(WD) 1164x194±0,1% (ST) 1164x300±0,1%	910x300±0,1%	600x300±0,5%
Thickness	EN ISO 24346 ISO 7322	mm	5 ±0,2	9,5 ±0,2	8,5 ±0,2	9,5 ±0,2	9,5 ±0,2	3 ±0,2
Squareness	EN ISO 24342	mm	< 0,3	< 0,3	< 0,3	< 0,3	< 0,3	< 0,4
Straightness	EN ISO 24342	mm	< 0,2	< 0,3	< 0,3	< 0,3	< 0,3	< 0,3
Apparent density	ISO 7322	Kg/m³						290
Mass per unit area	EN ISO 23997	g/m²	7700 ±10%	9100 ±10%	7400 ±10%	7400 ±10%	7300 ±10%	870 ±10%
Flatness of the panel Length concave/convex Width concave/convex	EN 16511	%	< 0,1 / 0,5 < 0,1 / 0,2	< 0,1 / 0,5 < 0,1 / 0,2	< 0,1 / 0,5 < 0,1 / 0,2	< 0,1 / 0,5 < 0,1 / 0,2	< 0,1 / 0,5 < 0,1 / 0,2	
Opening between panels	EN 16511	mm	< 0,1	< 0,1	< 0,1	< 0,1	< 0,1	
Height difference between panels	EN 16511	mm	< 0,1	< 0,15	< 0,15	< 0,15	< 0,15	
Locking strength Long / Short	EN ISO 24334	kN/m	>3 / >4	>3 / >4	>3 / >4	>3 / >4	>3 / >4	
Thickness swelling	EN ISO 24336	%	< 0,8	< 16	< 16	< 16	< 16	
Dimensional variation caused by changes in atmospheric humidity	ISO 24339	%	< 0,15	< 0,25	< 0,25	< 0,25	< 0,25	
Effect of a furniture leg	EN ISO 16581		No visible damages	No visible damages	No visible damages	No visible damages	No visible damages	
Effect of a castor chair	EN ISO 4918		No visible damages	No visible damages	No visible damages	No visible damages	No visible damages	
Residual indentation	EN ISO 24343-1	mm	< 0,1	< 0,25	< 0,15	< 0,25	< 0,25	
Wear resistance	EN 15468	Class	> 7000	> 7000	> 7000	> 7000	> 7000	
Compression	ISO 7322	%						≤ 40
Recuperation	ISO 7322	%						≥ 75
Dimensional stability	EN ISO 23999	%						< 0,4
Moisture Content	EN 12105	%						≤ 8
Curling	EN ISO 23999	mm						< 6
Tensile strength	ISO 7322	kPa						≥ 700
Safety Properties	Standard	Unit						
Reaction to fire	EN 13501-1	Class	Bfl-s1	Bfl-s1	Dfl-s1	Cfl-s1	Dfl-s1	E
Formaldehyde emission	EN 717-2 EN 12149	Class mg/Kg	E1	E1	E1	E1	E1	Pass
PCP content	CEN/TR 14823	ppm	< LOQ	< LOQ	< LOQ	< LOQ	< LOQ	
Vinyl chloride monomer (VCM)	EN 12149	mg/Kg						Pass
Migration of heavy metals and other elements	EN 12149	mg/Kg						Pass
Slip resistance	EN 14041	Class	DS	DS	DS	DS	DS	
Sliding coefficient	EN 13893 DIN 51130	Coeff.	> 0,35 / R11	> 0,35 / R11	> 0,35 / R11	> 0,35 / R11	> 0,35 / R11	
Additional Properties	Standard	Unit						
Thermal resistance	EN 12667	m².K/W	0,032	0,068	0,082	0,074	0,074	0,06
Thermal conductivity	EN 12667	W/m.K	0,159	0,140	0,104	0,126	0,126	0,05
Impact noise reduction ΔLw	EN ISO 10140-3	dB	17	16	17	18	18	
Sound absorption coefficient	EN ISO 354	α _w						0,05
Light fastness	EN ISO 105-B02	blue scale	6	6	6	6	5	
Micro-scratch resistance	EN 16094	Class	MSR-A2 / MSR-B1	MSR-A2 / MSR-B1	MSR-A2 / MSR-B2	MSR-A1	MSR-A1	
Impact resistance (big ball)	EN 13329	mm	> 1800	> 1800	> 1800	> 1800	> 1800	
Other Features								
Installation system			i4F 3L TripleLock	Uniclic®	Uniclic®	Uniclic®	Uniclic®	Glue-on
Surface Finish			DURAMOND®	DURAMOND®	EB-COATING	WEARTOP®	WEARTOP®	PARAWAX
Wear Layer			0,55 mm	0,33 mm				
FSC® certification				Available on request	Available on request	Available on request	Available on request	Available on request
VOC Emissions Certifications			AgBB Greenguard Gold A+	AgBB Greenguard Gold A+	AgBB Greenguard Gold A+	AgBB Greenguard Gold A+	AgBB Greenguard Gold A+	AgBB Greenguard Gold A+
Antibacterial protection				CleanCork Powered by Microban®	CleanCork Powered by Microban®	CleanCork/ CleanSurface Powered by Microban®	CleanCork/ CleanSurface Powered by Microban®	
Wear through Warranty		Years	25 Residential 10 Commercial	20 Residential 10 Commercial	15 Residential 5 Commercial	10 Residential 5 Commercial	10 Residential 5 Commercial	
m² (units) per carton		m² (un)	(WD) 1220x181: 12/carton = 2,65 m² (ST) 610x305: 14/carton = 2,60 m² (HB) 635x127: 16/carton = 1,29 m²	(WD) 1164x194: 8/carton = 1,81 m² (ST) 1164x300: 7/carton = 2,44 m²	8/carton = 2,79 m²	1164x194: 8/carton = 1,81 m² 1164x300: 7/carton = 2,44 m²	8/carton = 2,184 m²	88/carton = 15,84 m²
m² (cartons) per pallet		m² (un)	(WD) 1220x181: 52/pal = 137,8 m² (ST) 610x305: 60/pal = 156 m² (HB) 635x127: 98/pal = 126,5 m²	(WD) 1164x194: 56/pal = 101,4 m² (ST)1164x300: 45/pal = 109,8 m²	45/pal = 125,7 m²	(WD) 1164x194: 56/pal = 101,4 m² (ST) 1164x300: 45/pal = 109,8 m²	56/pal = 122,3 m²	42/pal = 665,3 m²
Weight of cartons		Kg	(WD) (ST) 20 Kg (HB) 10 Kg	(WD) 17 Kg (ST) 22 Kg	20 Kg	(WD) 14 Kg (ST) 18 Kg	16 Kg	12 Kg

Floors maintenance

All Trendcollection floors are easy to maintain. However, as any kind of floor, it requires continuous and proper cleaning and care so that the surface protection and the attractive appearance of the floor are maintained.

Preventive care

The floor must be kept clean. Never use cleaning products with abrasive ingredients or solvent based. Do not wet mop the floors. Too much water can cause the floor to swell or warp. Furniture legs should have protective pads to avoid scratches. Furniture and other heavy objects must be placed carefully. A doormat should be laid inside the front door to help protect against dirt and sand. Chair castors should be of type W (soft). For additional protection, mats under castor chairs can be used. Rugs should be used at areas where the wear is greater, e.g. in front of kitchen sinks, at the end of steps and within high traffic pathways. Rugs with rubber or vinyl backings should be avoid. Prolonged contact of plasticizer-containing material (e.g. rubber, latex, plastics...) with the floor surface may cause non-reversible stain of the floor. Avoid sharp or pointed objects with concentrated weight on your floor.

Never use any of the following products (or similar) on your finished floor: ammonia-based cleaners, wax-based products, bleach, oil soap, abrasive cleaning soaps or acidic materials such as vinegar. Many of these products can dull or etch the finish. The surface of the floors may tend to fade when exposed to sunlight. Use blinds or curtains to prevent colour fading by direct solar radiation.

Cleaning

Trendcollection floorings must be cleaned regularly with a mop, hair broom or vacuum cleaner. If necessary (heavier soiling) the floor can be damp-mopped using an appropriate cleaning product.

Maintenance

Maintenance caring can become necessary from time to time to refresh the protective layer. First clean your floor and then apply a thin layer of a recommended maintenance product using a microfiber applicator pad. Please observe the particular maintenance instruction for your floor. For the correct use, follow the instructions on the packaging labels of each product, as well as the information from technical data sheets.

Walls maintenance

Trendcollection wall tiles are finish with a special coating that will keep their beautiful look for many years. However, as any other kind of wall covering, it requires a proper cleaning to ensure durability and appearance. As time passes, wall tiles may, eventually, need some kind of maintenance. Although we can make general recommendations, the specific use conditions will determine how frequent maintenance is needed.

Cleaning and Maintenance

Periodic maintenance for wallcoverings should include light dusting or use of a vacuum cleaner with a soft brush attachment. Stains should be removed as soon as possible to limit possible reaction between the staining agent and the wallcovering. Time is especially important for removing materials containing colours or solvents, such as ballpoint ink, lipstick, oil, shampoo tints, and some foodstuff. Remove any damp or wet marks as much as possible using an absorbent material. Remove any dry marks or dirt using a slightly damp cloth, mild soap, warm water, and if necessary, a soft brush to remove dirt from the crevices of deeply textured patterns. For more difficult stains, the use of a standard non-aggressive cleaning agent is recommended. Only mist the wall lightly with the cleaning solution or spray the cleaner directly onto a clean sponge or cloth. Avoid excess rubbing.

Attention

Trendcollection products are made with high quality materials and should be handled accordingly. In spite of all due care given during manufacturing, there will be variations in appearance (colour, gloss, or texture). This should be verified before installation, distributing the tiles/planks in a way that variations are not striking. The surface may change colour when exposed to direct sunlight.

Although every effort has been made to ensure accuracy during the production of this catalogue, GRANORTE disclaims potential product changes and possible print errors. The product photos may not accurately match the real colour and texture of the finished product.

The floor for you

 **Trendcollection**
BY GRANORTE

GRANORTE - Revestimentos de Cortiça, Lda.
Avenida Santiago, 68 | 4520-470 Rio Meão | PORTUGAL
info@granorte.pt | www.granorte.pt

GRANORTE GmbH DEUTSCHLAND
Nimrodstraße 22 | 90441 Nürnberg | GERMANY
info@granorte.de | www.granorte.de

GRANORTE UK LTD
Unit 18 Cedar Court | Halesfield 17 | Telford TF7 4PF | UK
info@granorte.co.uk | www.granorte.co.uk

VANETON Srl a unico socio
Via Repubblica di San Marino, 38 | 41123 Modena | ITALIA
info@granorte.it | www.granorte.it

Shanghai Parquet Cork Import & Export Co., Ltd.
No. 667 Long Ziwei Rd. | Building 135, Room 201
Pudong Dist. Shanghai 201210 | CHINA

